

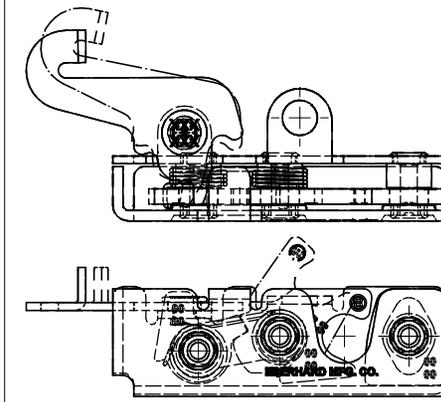
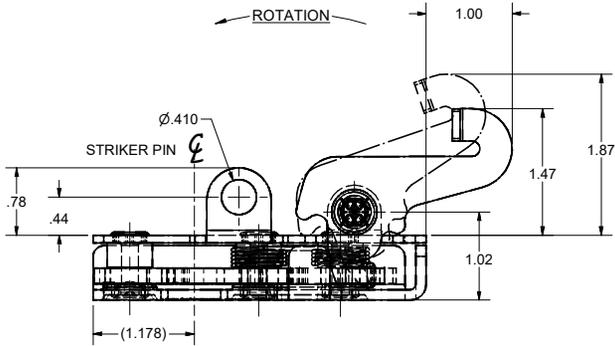
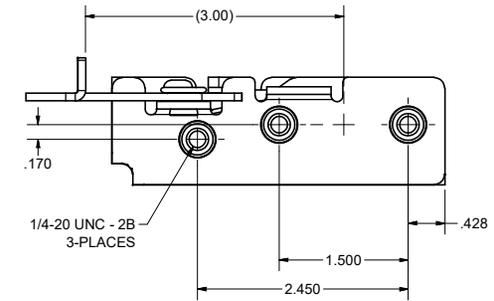


CONFIDENTIAL NOTICE: This drawing and the designs, specifications and engineering information disclosed hereon are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. The drawing is loaned in confidence and then only for consideration of the matter disclosed hereon. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed hereon in confidence and not to use nor permit their use in any way hereon to Eberhard Manufacturing Company, Division of the Eastern Company, 2184 Drake Road, Cleveland, Ohio 44143-9712. © 2019 EBERHARD MFG. CO.

REVISION HISTORY		EN	DATE	REV BY	APVD BY
REV	DESCRIPTION				
1	RELEASED FOR PRODUCTION REF PPT200-E, WAS 2C-M1283D-RL	5905	5/3/2019	KAB	SKK



16T-475-L, LEFT HAND
LOW PROFILE ROTARY LOCK ASSEMBLY
AND THREADED SPACERS

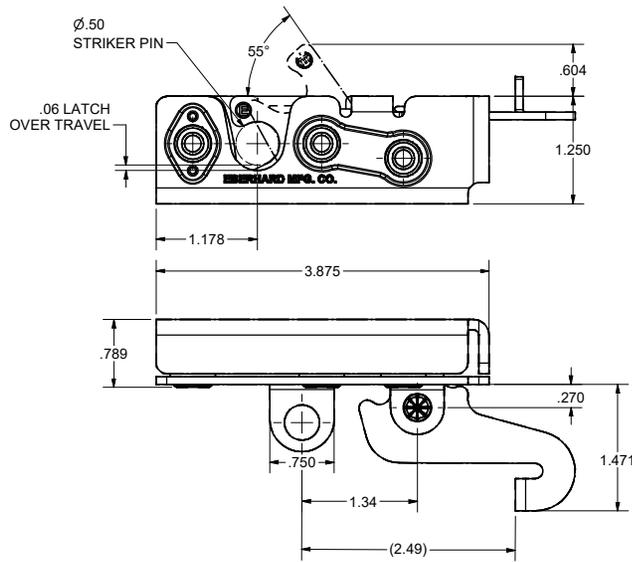

- NOTES:
- THIS ROTARY LOCK ASSEMBLY MEETS ALL REQUIREMENTS FOR FMVSS 206 SAFETY STANDARD WHEN MOUNTED WITH THREE 1/4-20 UNC-2A, GRADE 8 BOLTS.
 - RECOMMENDED TORQUE FOR TIGHTENING: 105 ±10 in./lbs.
 - SPRING RATE:
LATCH: 1.07 LBS*IN - UNLATCHED POSITION
PAWL: 1.03 LBS*IN - ACTUATED POSITION
 - AVAILABLE EBERHARD FINISHES:
- YELLOW ZINC WITH EVERLUBE INTERNAL COMPONENTS, FC (64)

CUSTOMER PRINT
SHEET 1 OF 2
RIGHT HAND SHOWN
LEFT HAND OPPOSITE



THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2018		DATE
UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS:		5/3/2019
ANGLES:	±.1°	
2 PLACE DEC:	±.05	
3 PLACE DEC:	±.015	
FINISHES:	±.000	

EBERHARD MANUFACTURING CO.	
DIVISION OF THE EASTERN COMPANY CLEVELAND, OHIO 44143-9712	
DESCRIPTION	LOW PROFILE ROTARY LOCK ASSEMBLY W/ 1/4-20 THREADED SPACERS & SPECIAL LEVER ARM
REV	16T-475-RL

C:\TEMP\44162b7-6995-4e4f6-bbc5-c7f69028e0b1\Pro4475\16T-475-RL_S11.dwg