
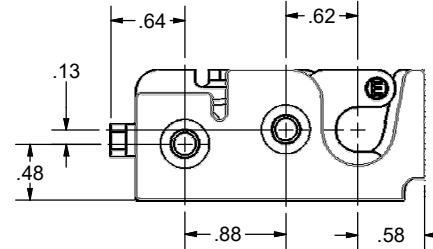

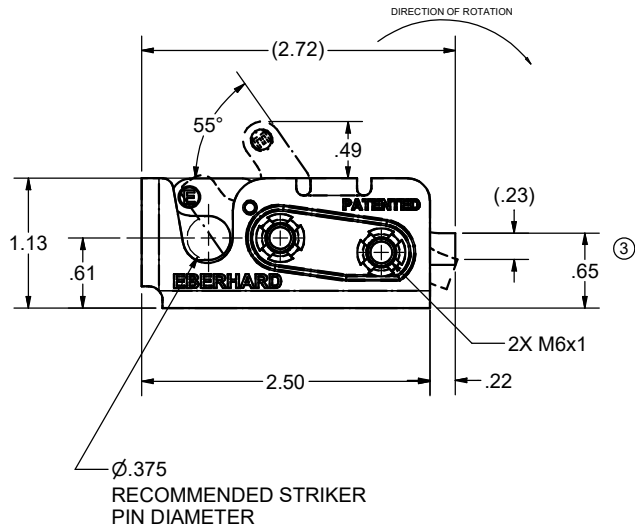
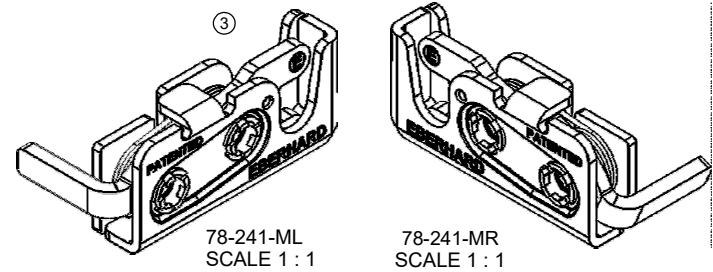


CONFIDENTIAL NOTICE: This drawing and the designs, specifications and engineering information disclosed hereon are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. The drawing is loaned in confidence and then only for consideration of the matter disclosed hereon. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed hereon in confidence and not to use nor permit their use in any way detrimental to Eberhard Manufacturing Company, Division of the Eastern Company, 21944 Drake Road, Cleveland, Ohio 44149-9712 © 2010 EBERHARD MFG. CO.

REVISION HISTORY		EN	DATE	REV BY	APVD BY
REV	DESCRIPTION				
	RELEASED, WAS 2-M8005	5454	5/21/2010		
1	.14 WAS .13, DIA. 375 WAS .38	5464	7/30/2010		
2	ADDED .65 REFERENCE DIM. AND NOTE #3	5596	3/22/2013		
3	ADD LEFT HAND VIEW	5809	6/30/2017	VRB	MR

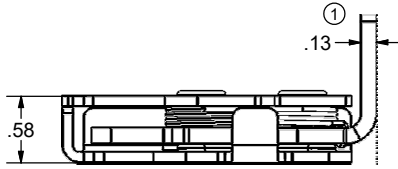

WARNING
THIS PRODUCT MUST NOT BE USED FOR
PERSONAL RESTRAINT APPLICATIONS

MINI ROTARY IS A TRADEMARK OF EBERHARD MFG. CO.,
DIVISION OF THE EASTERN COMPANY.

CUSTOMER PRINT
SHEET 1 OF 2

RIGHT HAND SHOWN
LEFT HAND OPPOSITE

- NOTES: ③
- 1) USE M6X1 CLASS 8.8 BOLTS FOR INSTALLATION. RECOMMENDED INSTALLATION TORQUE: 14 FT-LB.
 - 2) MAX LOAD RATING - 750 LBS
 - 3) ALL DIMENSIONS ARE FOR REFERENCE ONLY

FINISH: (64) ZINC & YELLOW CONVERTER WITH EVERLUBE INTERNAL COMPONENTS
(BG) BEARING GREASE WITH EVERLUBE INTERNAL COMPONENTS

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:		DATE 5/25/2010	NAME SINGLE STAGE MINI-ROTARY LOCK ASSEMBLY WITH M6 MOUNTING THREADS	
ANGLES: ± 2'	2 PLACE DEC.: ± .03	DR BY RBernot	MATERIAL	
3 PLACE DEC.: ± .015	ALL HOLES: ± .005	SCALE FULL	PART NUMBER 78-241-MRL	
		CHK BY		

C:\TEMP\1e7032ec-d01e-4289-a105-a4c984f186a1\Pro\2\24178-241-MRL SH11.dwg