


**CONFIDENTIAL NOTICE:** This drawing and the designs, specifications and engineering information disclosed herein are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. The drawing is loaned in confidence and then only for consideration of the matter disclosed herein. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed herein in confidence and not to use nor permit their use in any way detrimental to Eberhard Manufacturing Company, Division of the Eastern Company, 21944 Drake Road, Cleveland, Ohio 44149-9712 © 2012 EBERHARD MFG. CO.

REVISION HISTORY					
REV	DESCRIPTION	EN	DATE	REV.BY	APVD.BY
	RELEASED FROM M-10395	5538	1/27/2012		
1	MODIFIED DIMENSION IN CHART	5566	08/10/2012		
2	CHANGED MIN & MAX. PANEL THICKNESS	5748	4/15/2016	KAB	MR

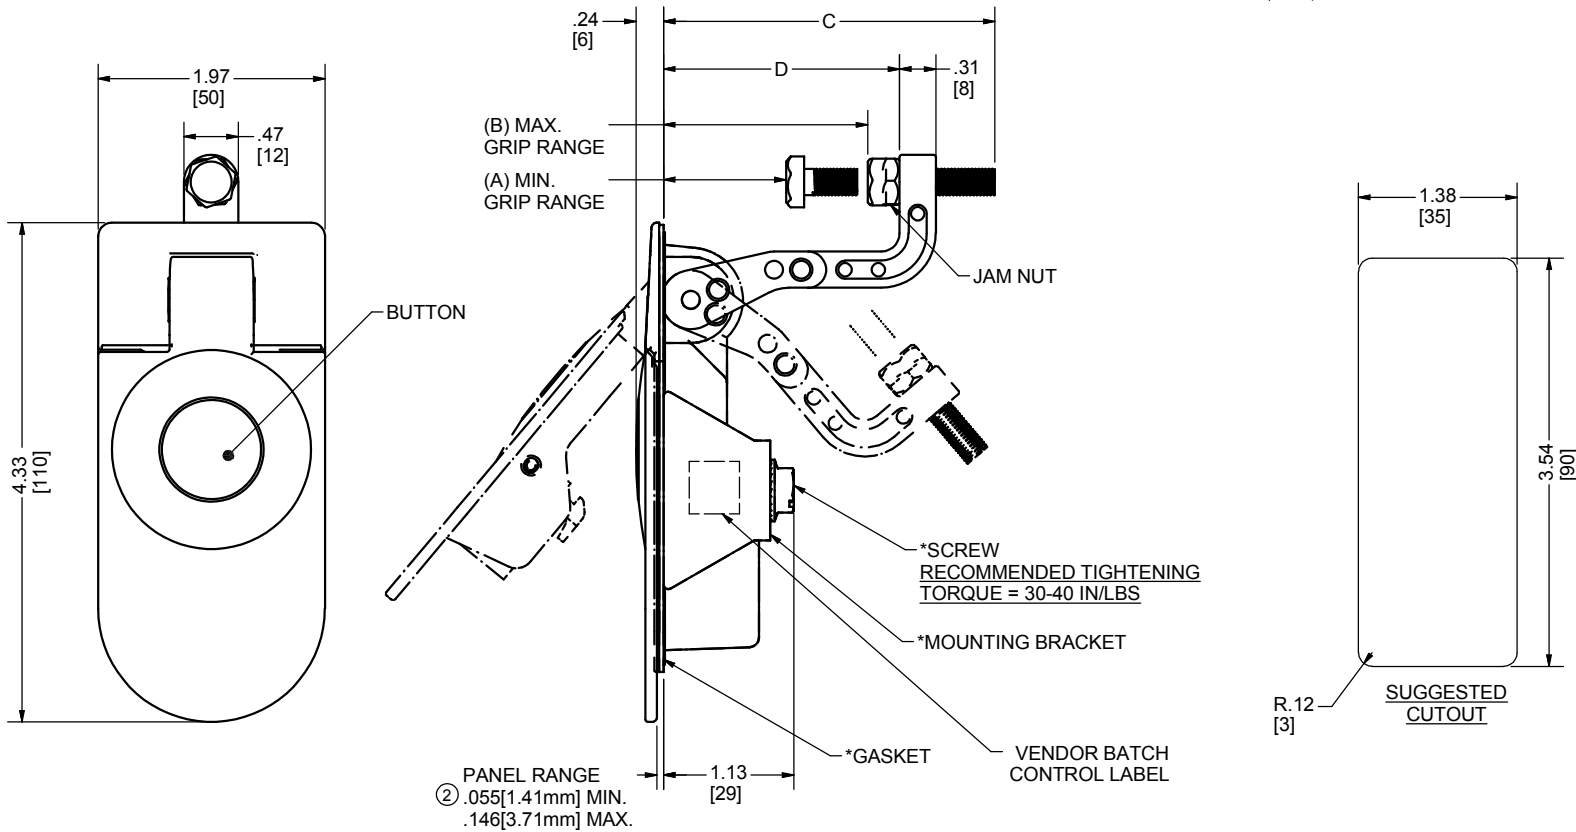

PANEL RANGE  
 ② .055[1.41mm] MIN.  
 .146[3.71mm] MAX.

\*SCREW  
 RECOMMENDED TIGHTENING  
 TORQUE = 30-40 IN/LBS

SUGGESTED  
 CUTOUT

FINISH:  
 (42) BLACK POWDER (TEXTURED)

**NOTE:**  
 \*GASKET, MOUNTING BRACKET, AND SCREW  
 SHIPPED LOOSE IN A SECURED POLY BAG.  
 PLACED IN A LARGER BAG WITH TRIGGER LATCH

PART NO.	A	B	C	D
834	0[0]	.55[14]	1.58[40]	.79[20]
835	.35[9]	1.14[29]	2.21[56]	1.42[36]
836	.98[25]	1.77[45]	2.84[72]	2.05[52]
837	1.45[37]	2.24[57]	3.27[83]	2.48[63]

THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.15-2009			
LINEAR MEASURE: INCH		DATE: 1/20/2012	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:			
TOLERANCES ARE AS FOLLOWS:		DR BY: gbolger	
ANGLES: $\pm$ .21 $\pm$ .21		SCALE: .	
2 PLACE DEC.: $\pm$ .03 $\pm$ .76		CHK BY:	
3 PLACE DEC.: $\pm$ .015 $\pm$ .38			
ALL HOLES: $\pm$ .005 $\pm$ .13			

CUSTOMER PRINT  
SHEET 1 OF 2

**EBERHARD MANUFACTURING CO.**  
 DIVISION OF  
**THE EASTERN COMPANY**  
 CLEVELAND, OHIO 44149-9712

**TRIGGER LATCH  
 (NON-LOCKING)**

MATERIAL	PART NUMBER	CHART
	<b>834</b>	